



FLEXYLED SE H4-24 D-MOTION

Domus Line
design

Recessed silicone LED profile

Materials:

silicone, thermoplastic polymers

Finishes:

white

Light source:

twin LED module (144 twin LED/m)

Connector:

Micro24

Wiring:

2x2000mm



Application type:

universal

Installation:

recessed

FLEXYLED SE H4-24 D-MOTION is a 24Vdc flexible linear LED profile developed by implementing a new extrusion technology of diffusing silicone materials. **FLEXYLED SE H4-24 D-MOTION** is specifically designed for recessed installation in grooves with a width of just 4 mm and a depth of 8 mm flushed with the panel. The **TWA (Tunable White)** configuration is used for static or dynamic colour temperature selection (2700 - 4000 K) with remote selector supplied separately. Available in two pre-wired modules (200 and 300 cm), it can be divided every 42mm.



* values referring to FLEXYLED SE H4-24 TWA

Colour appearance	Tunable White
Colour temperature	2700 - 4000 Kelvin
Luminous efficiency	85 lm/W
CRI	Ra ≥ 90



FLEXYLED SE H4-24 TWA is a luminaire belonging to the new D-MOTION collection.




FLEXYLED SE H4-24 TWA

144 twin LED/m module - with double power cable



Code	Length	Watt & Volt
	2000mm	19,2W @ 24Vdc
	3000mm	28,8W @ 24Vdc

CONVERTER AND TWA SELECTOR NOT INCLUDED. TO BE ORDERED SEPARATELY.

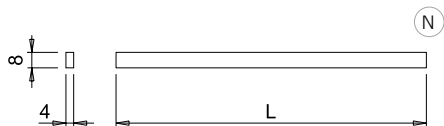

N This drawing shows the profile's overall dimensions. See installation manual for more details.





Tunable White (TWA) luminaires of the D-MOTION collection allow the static or dynamic colour temperature selection (2700 - 4000 K) by a remote selector supplied separately.




EXTREME FLEXIBILITY

Thanks to the flexibility of the LED strip, **FLEXYLED SE H4-24 TWA** can be used to install the luminaire in a straight, curved or circular groove or in any other configuration.

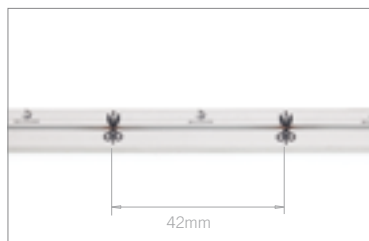

MODULARITY

FLEXYLED SE H4-24 TWA can be divided at 42mm (6 twin LED).

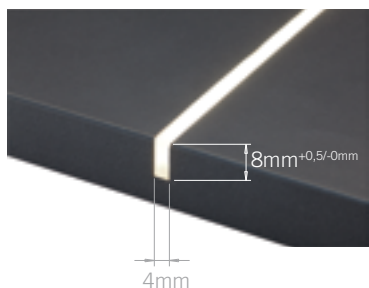

PRESS-ON INSTALLATION

The **FLEXYLED SE H4-24 TWA** does not require glue or other kinds of adhesive, as it is made from soft silicone that is simply pressed into the groove. It is ideal for the sides of wardrobes.

TECHNICAL DATA

Power	see table
Power supply	24Vdc
LEDs/metre	144
Divisibility	4,2cm (6 twin LED)
Cable	2x2000mm
Protection	IP20
3M® adhesive	no

For LED converters and accessories consult the **Domus Extra catalogue** also available on www.domusline.com.

