

Quick Installation Reference Guide of Pocket door slides

Step 1. Before You Start

* The DIM. Might vary due to different manufactures and hinge types

a. Read the instruction completely before installation

b. Make sure all components are included in the package

- | | |
|--|-----------------------------------|
| 1 Right Hand and 1 Left Hand Pocket Door Slide | 6 5/8" Pan Head wood screws |
| 4 5/8" Flat Head wood screws | 4 M4 x 6 machine screws |
| 2 Guide Rollers | 2 23mm wood screws |
| 6 M4 x 6 Round Head machine screw | 2 M4 x 6 Round Head machine screw |
| 2 Adjustable Follower strip | 2 Hinges (Bought Separately) |

Step 3: attach metal follower strip onto slides by M4 screws, or wooden follower strip onto slides by pan head screws 5/8".

a. For wooden follower strip, please cut wooden strip to the DIM.

L(cabinet height-156mm) x W (68~70mm) x T (16~19mm)

b. For metal follower strip, adjust 2 metal follower strips to suitable length then fixed M5 screws. (Metal follower strip is adjustable from 510mm to 740mm at 38mm increment, which is suitable to the door height from 28" to 42 ".

c. For the door larger than 42", the wooden follower strip is recommended to assure the smooth operation, and the 3rd slide is suggested to be utilized for a better load capacity.

Step 4: Mount the hinge plate onto slide by flat head screw M4 x 6mm.

Step 5: Place slides as Figure A which mount the lower side slide down to the cabinet bottom .

DIM A1: Door thickness + 3mm. Install pan head screws through horizontal slot holes for adjustment first, then screw the round hole for fixing purpose.

Step 6: Bore the hinge cup holes as shown on Figure B

DIM B1: 39~40mm is recommended.

DIM B2: 7~8mm is recommended.

DIM B3: (Upper slide center to lower slide center distance) – 46mm.

Step 7: Mount the hinge cup onto the door by flat head 5/8" screws.

Step 8: Install the guide rollers on the top and bottom of cabinet as figure C.

DIM. C1: Door thickness + 9.5mm (roller dia. / 2) + 9.8mm slide thickness + 3mm (movement clearance).

DIM. C2: Door thickness + 9.5mm (roller dia. / 2)

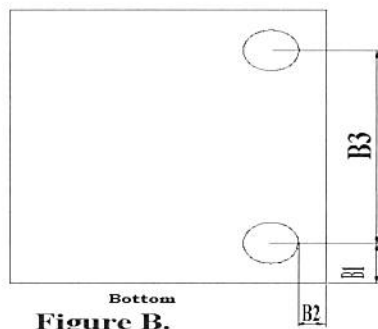
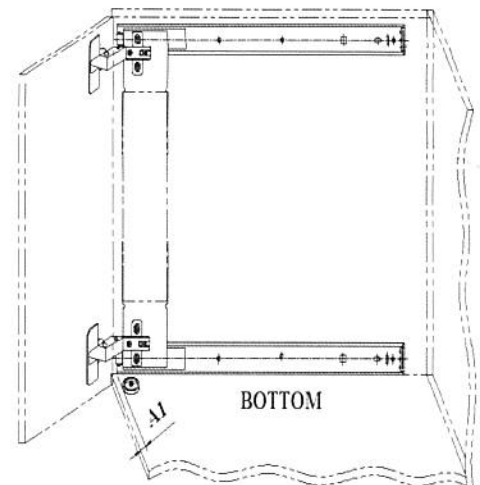


Figure B.

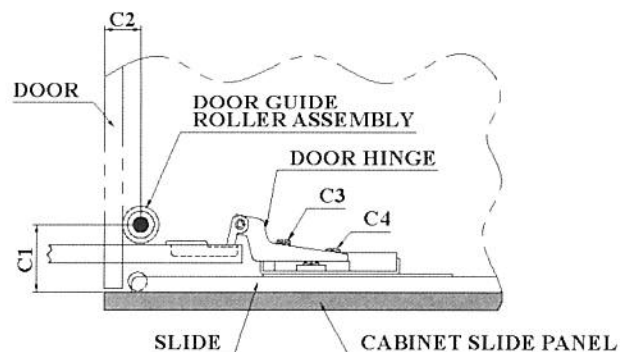


Figure C.

Step 7: Attach the door onto cabinet by hinges.(bought separately)

Tips on door gap adjustments.For upper and lower gaps, please adjust mounting plate vertical position

1. For door left or right side gaps, please adjust C3.
2. Adjust C4 screw for door close position in-out adjustment.